



Flexiguard™ Solutions

3M™ DBI-SALA® Flexiguard™ Solutions

# Full Line Catalog

Fall 2016

**Versatile, reliable fall protection  
for unique work environments.**





Specific applications call for flexible solutions. 3M™ DBI-SALA® Flexiguard™ Solutions are:

Durable

- Powder-coated, anodized high strength alloy.
- Specifically engineered for extra tall and wide applications.
- Enclosed rail to help keep debris out (weather elements).
- 100% fall arrest rated tie-off from the ground up.
- SAE J429 Grade 8 hardware with zinc yellow Chromate-plated finish.

Portable

- Lightweight design—easily moved by minimal personnel.
- Most allow for positioning by a forklift or other service vehicle.
- Heavy-duty stabilization for use on uneven ground.

Versatile

- Indoor and outdoor use.
- Multiple overhead anchor points on systems that are designed for multiple users.
- Provides a large, working area — working radius from rail is 6 ft. or 30 degrees.
- Rigid anchor points have no deflection or sag, reducing fall clearance requirements.
- Systems can be permanently mounted (where applicable).
- Flexiguard custom solutions meet the needs of specific and challenging work environments.



Keep your workers protected with lasting solutions. Every aspect of our process—from our internal ISO-certified lab and technicians, to our industry-leading installation, training and annual inspections—is designed to cover you throughout equipment life.

Our products are tested and certified by our engineering and manufacturing team in Red Wing, MN. They meet and often exceed the latest regulatory standards, including compliance with ANSI, CE and OSHA standards.



Popular applications include:

TRANSPORT

UTILITIES

MINING

CONSTRUCTION

OIL AND GAS

WIND ENERGY

For product inquiries:  
3M.com/FallProtection  
800-328-6146  
3mfallprotection@mmm.com

Table of contents

SafRig™ System..... 4

Counterweight Jib ..... 5

Engineered Modular Unit ..... 6

Counterweighted System .....7

C-Frame System..... 8

A-Frame System..... 9

Freestanding Ladder System .....10

Sky Anchor System ..... 11

Supported Ladder System.....12

Box Frame .....13

Trailer Mounted Anchor Systems .....14

Accessories.....15






# 3M™ DBI-SALA® SafRig™ System

Maximize safety while maintaining portability. The Flexiguard SafRig Fall Protection System is designed for applications that require a large work area in a limited space. The smaller frame allows trucks to be parked side-by-side during use but does not require the weight of the vehicle as the anchoring force. The 360 degree rotational boom provides a 5 ft. (1.5 m) working offset, and has the capacity to provide fall protection or a rescue system for one person. Forklift pockets simplify moving the system around a job site. Depending on the type of base, these systems are ANSI, OSHA and CE compliant.

## SafRig Systems

- Periscoping rotation handle included for turning system into working position.
- Counterweight base solutions available with or without concrete.
- Each type of system comes rescue-ready with inclusion of pulleys and the winch mounting plate.

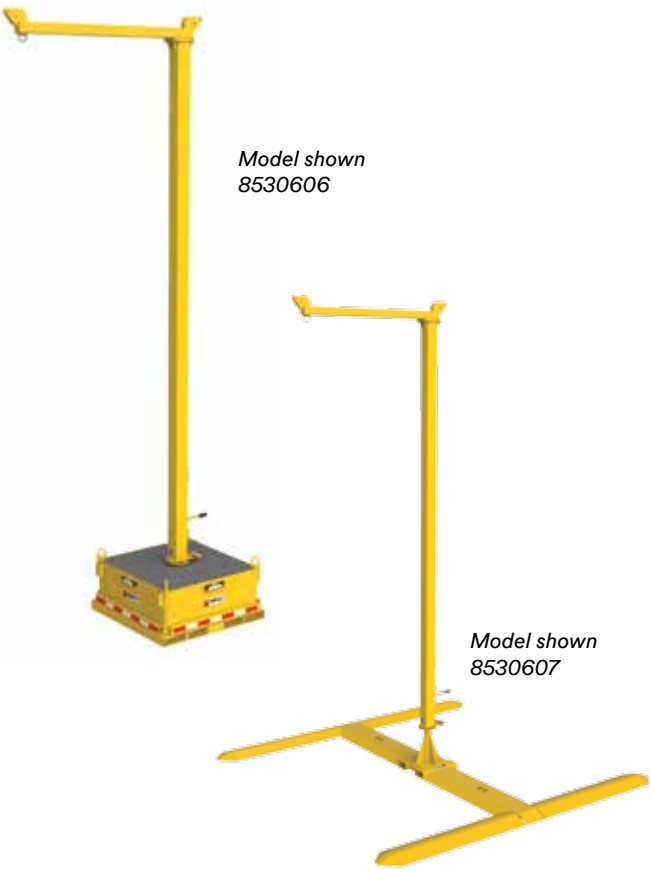

### SafRig with Outrigger Base

| Base                              | Anchor height  | Offset                | PPE          | # of Users | Part #  |
|-----------------------------------|----------------|-----------------------|--------------|------------|---------|
| 15 ft. (4.56 m) x 15 ft. (4.56 m) | 20 ft. (6.1 m) | 5 ft. 10 in. (5.36 m) | not included | 1          | 8530607 |
| 15 ft. (4.56 m) x 15 ft. (4.56 m) | 20 ft. (6.1 m) | 5 ft. 10 in. (5.36 m) | included*    | 1          | 8530579 |

### SafRig with Counterweight Base and PPE Kit

| Base                | Anchor height  | Offset               | PPE          | Concrete | # of Users | Part #  |
|---------------------|----------------|----------------------|--------------|----------|------------|---------|
| 4 ft. 6 in. (1.4 m) | 20 ft. (6.1 m) | 5 ft. 9 in. (5.36 m) | not included | with     | 1          | 8530606 |
| 4 ft. 6 in. (1.4 m) | 20 ft. (6.1 m) | 5 ft. 9 in. (5.36 m) | not included | without  | 1          | 8530619 |
| 4 ft. 6 in. (1.4 m) | 20 ft. (6.1 m) | 5 ft. 9 in. (5.36 m) | included     | with     | 1          | 8530595 |
| 4 ft. 6 in. (1.4 m) | 20 ft. (6.1 m) | 5 ft. 9 in. (5.36 m) | included     | without  | 1          | 8530620 |

\*PPE Kit includes: 20 ft. (6.1 m) Ultra-Lok™ Self-Retracting Lifeline with Safflok™ Carabiner and 25 ft. (7.6 m) tagline.

TRANSPORT

CONSTRUCTION

UTILITIES

MINING

# 3M™ DBI-SALA® Counterweight Jib

Indoor and outdoor maintenance is simpler and safer with our Counterweight Jib System. Featuring a 360 degree rotating jib, this portable solution provides mobility and fall protection for one person. Forklift pockets are strategically located on all four sides of the base to help ensure ease of mobility and placement between job sites. The base also contains four heavy-duty lifting rings for transport by a crane. These systems are ANSI and OSHA compliant.

## Counterweight Jib Systems

- Periscoping rotation handles included for turning system into working position.
- Counterweight base solutions available with or without concrete.
- Installed rail with trolley.

| Anchor height     | Offset        | Concrete | # of Users | Part #  |
|-------------------|---------------|----------|------------|---------|
| 16.75 ft. (5.1 m) | 8 ft. (2.4 m) | without  | 1          | 8517750 |
| 16.75 ft. (5.1 m) | 8 ft. (2.4 m) | with     | 1          | 8517751 |
| 20.67 ft. (6.3 m) | 8 ft. (2.4 m) | without  | 1          | 8517752 |
| 20.67 ft. (6.3 m) | 8 ft. (2.4 m) | with     | 1          | 8517753 |
| 23.67 ft. (7.2 m) | 8 ft. (2.4 m) | without  | 1          | 8517754 |
| 23.67 ft. (7.2 m) | 8 ft. (2.4 m) | with     | 1          | 8517755 |

## No-Base Systems

- Attach to supporting, fixed structure (e.g. on I-Beam) on the job site.
- Mounting clamps, plates and hardware included with systems.
- System rotates 180 degrees and locks every 7.5 degrees.
- Installed rail with trolley.

| Boom height     | Offset         | # of Users | Part #  |
|-----------------|----------------|------------|---------|
| TBD by end user | 20 ft. (6.1 m) | 1          | 8530433 |

TRANSPORT

CONSTRUCTION

UTILITIES

MINING





# 3M™ DBI-SALA®

## Engineered Modular Unit

Simplify adjustment and maximize flexibility without sacrificing fall protection. The highly customizable Flexiguard™ Engineered Modular Unit makes it possible. This modular system features a lightweight design, allowing for easy mobility around the job site with a pallet jack or forklift. With three adjustable height models and one fixed height version—plus three mounting options—there is a configuration to fit virtually any need. The 360 degree rotation mast allows for a 6 ft. (1.8 m) working radius from the anchor point. These systems are ANSI and OSHA compliant.

### Engineered Modular Unit Systems

- Rotation handle included for turning system into working position.
- Installed rail with trolley.
- Rotational locking pin includes adjustments every 11 degrees.

### Fixed Height Systems

| Anchor height  | Offset        | # of Users | Part #  |
|----------------|---------------|------------|---------|
| 21 ft. (6.4 m) | 7 ft. (2.1 m) | 1          | 8530571 |

### Adjustable Height Jib Systems

| Anchor height                 | Offset        | Concrete | # of Users | Part #   |
|-------------------------------|---------------|----------|------------|----------|
| 10 ft.-15 ft. (3.05 m-4.57 m) | 7 ft. (2.1 m) | n/a      | 1          | 8530557  |
| 13 ft.-20 ft. (3.96 m-6.10 m) | 7 ft. (2.1 m) | n/a      | 1          | 8530558  |
| 15 ft.-25 ft. (4.57 m-7.62 m) | 7 ft. (2.1 m) | n/a      | 1          | 8530559  |
| 15 ft.-25 ft. (4.57 m-7.62 m) | 7 ft. (2.1 m) | without  | 2          | 8530538* |

### Base Configurations

| Base type                          | Concrete | Part #  |
|------------------------------------|----------|---------|
| Flush floor mount                  | n/a      | 8530564 |
| Top floor mount                    | n/a      | 8530565 |
| 5,000 lb. (2,268 kg) Counterweight | with     | 8530566 |
| 5,000 lb. (2,268 kg) Counterweight | without  | 8530621 |

### Accessories

| Accessory         | Compatible systems | Part #  |
|-------------------|--------------------|---------|
| Lifting eyes (4)  | 8530566, 8530621   | 8530777 |
| Jack leveling kit | 8530566, 8530621   | 8530563 |

\*Includes counterweight base without concrete.

TRANSPORT

CONSTRUCTION

UTILITIES

MINING



Model shown 8530564

Model shown 8530565

Model shown 8530566 with 8530777

Model shown 8530563

Model shown 8530777

Model shown 8530557

# 3M™ DBI-SALA®

## Counterweighted System

Create an overhead anchor point for multiple workers with ease. The Counterweighted System is a portable solution designed for counterbalancing by concrete or other means, allowing for close positioning to the work surface without obstructing the equipment being accessed. These systems are ANSI and OSHA compliant.

### Counterweighted Systems

- Provide effective/economical means of anchoring overhead.
- Includes systems with and without the concrete counterweight on base of unit.
- Ideal in areas with no overhead obstructions and door height restrictions.
- System includes one rail with two trolleys.
- System includes heavy-duty leveling jacks and tag line assist.

| Anchor height  | Rail width      | Offset        | Weighted     | # of Users | Part #  |
|----------------|-----------------|---------------|--------------|------------|---------|
| 22 ft. (6.7 m) | 32 ft. (9.8 m)  | 8 ft. (2.4 m) | not included | 2          | 8517760 |
| 22 ft. (6.7 m) | 32 ft. (9.8 m)  | 8 ft. (2.4 m) | included     | 2          | 8517761 |
| 22 ft. (6.7 m) | 42 ft. (12.8 m) | 8 ft. (2.4 m) | not included | 2          | 8517762 |
| 22 ft. (6.7 m) | 42 ft. (12.8 m) | 8 ft. (2.4 m) | included     | 2          | 8517763 |

TRANSPORT

CONSTRUCTION

UTILITIES

MINING



Model shown 8517760



# 3M™ DBI-SALA®

## C-Frame System

A versatile fall arrest solution for working at height, the C-Frame System is designed to be moved manually or with the use of a tow bar and service vehicle. It requires some clearance under the equipment being accessed to accommodate outrigger support legs. These systems are ANSI, OSHA and CE compliant.

### Adjustable Height Systems

- Adjustable by manually cranking winch.
- Most often used in areas with no overhead obstructions or door height restrictions.
- System includes heavy-duty leveling jacks.
- Each system includes one rail with two trolleys.

| Anchor height                        | Rail width     | Wheels                      | # of Users | Part #  |
|--------------------------------------|----------------|-----------------------------|------------|---------|
| 12.5 ft.-19 ft.<br>(3.8 m-5.85 m)    | 10 ft. (3 m)   | 16 in. (0.4 m)<br>Pneumatic | 2          | 8517701 |
| 12.5 ft.-19 ft.<br>(3.8 m-5.85 m)    | 20 ft. (6.1 m) | 16 in. (0.4 m)<br>Pneumatic | 2          | 8517705 |
| 17.5 ft.-28.75 ft.<br>(5.3 m-8.8 m)  | 15 ft. (4.6 m) | 16 in. (0.4 m)<br>Pneumatic | 2          | 8517707 |
| 17.5 ft.-28.75 ft.<br>(5.3 m-8.8 m)  | 20 ft. (6.1 m) | 16 in. (0.4 m)<br>Pneumatic | 2          | 8517709 |
| 22.5 ft.-38.75 ft.<br>(6.8 m-11.8 m) | 15 ft. (4.6 m) | 16 in. (0.4 m)<br>Pneumatic | 2          | 8517711 |
| 22.5 ft.-38.75 ft.<br>(6.8 m-11.8 m) | 20 ft. (6.1 m) | 16 in. (0.4 m)<br>Pneumatic | 2          | 8517713 |

TRANSPORT



CONSTRUCTION



MINING





Model shown  
8517709



# 3M™ DBI-SALA®

## A-Frame System

The A-Frame System provides a secure anchor point on portable structures to give workers increased coverage and protection. Depending on the configuration, this system has the capacity to provide fall protection for up to two workers and can be easily moved from one job site to the next—providing reliable fall protection where you need it. These systems are ANSI, OSHA and CE compliant.

### Fixed Height Systems

- Provide effective/economical means of anchoring overhead.
- Each system contains a single rail rated for two users.
- Ideal in areas with no overhead obstructions or door height restrictions.
- System includes heavy-duty leveling jacks.

| Anchor height  | Rail width     | Wheels                | # of Users | Part #  |
|----------------|----------------|-----------------------|------------|---------|
| 15 ft. (4.6 m) | 15 ft. (4.6 m) | 16 in. (0.4 m) Caster | 2          | 8517790 |
| 15 ft. (4.6 m) | 20 ft. (6.1 m) | 16 in. (0.4 m) Caster | 2          | 8517791 |
| 15 ft. (4.6 m) | 30 ft. (9.1 m) | 16 in. (0.4 m) Caster | 2          | 8517792 |
| 20 ft. (6.1 m) | 15 ft. (4.6 m) | 16 in. (0.4 m) Caster | 2          | 8517793 |
| 20 ft. (6.1 m) | 20 ft. (6.1 m) | 16 in. (0.4 m) Caster | 2          | 8517794 |
| 20 ft. (6.1 m) | 30 ft. (9.1 m) | 16 in. (0.4 m) Caster | 2          | 8517795 |
| 30 ft. (9.1 m) | 15 ft. (4.6 m) | 16 in. (0.4 m) Caster | 2          | 8517796 |
| 30 ft. (9.1 m) | 20 ft. (6.1 m) | 16 in. (0.4 m) Caster | 2          | 8517797 |
| 30 ft. (9.1 m) | 30 ft. (9.1 m) | 16 in. (0.4 m) Caster | 2          | 8517798 |


### Adjustable Height Systems

- Can be adjusted using overhead crane, forklift or powered systems.
- Each system contains two rails for bypassing trolleys.
- Designed for areas with overhead obstructions and door height limitations where lowering the overall height of the A-Frame is a requirement.
- System includes heavy-duty leveling jacks.


| Anchor height                    | Rail width     | Wheels                      | # of Users | Part #  |
|----------------------------------|----------------|-----------------------------|------------|---------|
| 16 ft.-22.5 ft.<br>(4.9 m-6.9 m) | 20 ft. (6.1 m) | 16 in. (0.4 m)<br>Pneumatic | 2          | 8517780 |
| 16 ft.-22.5 ft.<br>(4.9 m-6.9 m) | 30 ft. (9.1 m) | 16 in. (0.4 m)<br>Pneumatic | 2          | 8517781 |




TRANSPORT




CONSTRUCTION



UTILITIES



MINING





Model shown  
8517790



# 3M™ DBI-SALA®

## Freestanding Ladder System

Easy access. 100% fall protection from the ground up. Achieve both for up to two users for the duration of the work with our Freestanding Ladder System. System configurations include guardrails and the use of multiple self-retracting lifelines (SRLs). These models are ANSI, OSHA and CE compliant.

### Adjustable Height Systems

- Manual height adjustment via winch assembly.
- Multiple height adjustment ranges available.
- All systems include a fall arrest bar for accessing ladder.
- System includes heavy-duty leveling jacks.

| Platform height                  | System type     | Wheels                   | # of Users | Part #  |
|----------------------------------|-----------------|--------------------------|------------|---------|
| 10.75 ft.-15.5 ft. (3.3 m-4.7 m) | Portable ladder | 16 in. (0.4 m) Pneumatic | 2          | 8517715 |
| 14.5 ft.-23 ft. (4.4 m-7.0 m)    | Portable ladder | 16 in. (0.4 m) Pneumatic | 2          | 8517717 |
| 18.25 ft.-31 ft. (5.6 m-9.4 m)   | Portable ladder | 16 in. (0.4 m) Pneumatic | 2          | 8517719 |



# 3M™ DBI-SALA®

## Sky Anchor System

Increase coverage and fall protection with the secure anchorage point of a Sky Anchor Solution. All systems are rated for one-person use and provide 360 degree mobility within the working radius from the anchor point. All available systems incorporate a collapsible design for easy setup, as well as a variety of bases for securing the system onto any job site. These systems are ANSI and OSHA compliant.

### Sky Anchor Systems

- Lightweight aluminum construction.
- Collapsible design.
- 360 degree mast rotation.
- 6 ft. (1.8 m) safe working radius from anchor.

| Anchor height     | Offset        | # of Users | Part #  |
|-------------------|---------------|------------|---------|
| 15.25 ft. (4.6 m) | 6 ft. (1.8 m) | 1          | 8530152 |
| 18.75 ft. (5.7 m) | 6 ft. (1.8 m) | 1          | 8530161 |
| 21.25 ft. (6.5 m) | 6 ft. (1.8 m) | 1          | 8530387 |
| 23.25 ft. (7.1 m) | 7 ft. (2.1 m) | 1          | 8530320 |

### Sky Anchor Base Configurations

- Each base option can be used with each Sky Anchor option.
- Each base option is rated for one user.

| Base image | Base type         | Part #   |
|------------|-------------------|----------|
|            | Top floor mount   | 8530210  |
|            | Core mount sleeve | 8530314  |
|            | Flush floor mount | 8530162* |

\*Base Cap option can be used with this base.

CONSTRUCTION

UTILITIES

MINING

OIL AND GAS





# 3M™ DBI-SALA®

## Supported Ladder System

Enables access and maintenance of transportation vehicles across a wide variety of different applications and environments with our portable Supported Ladder System.

This unique solution offers the best in passive and active fall protection. The work platform is fully enclosed by guardrails for passive fall protection and easily accessible through two spring-loaded swing gates. You can also access the working surface of the vehicle through one spring-loaded gate while tied off to the active fall arrest rail. This system is ANSI and OSHA compliant.

### Supported Ladder System

- Heavy-duty steel base design with an aluminum platform and fall arrest rail.
- Work platform is covered in a non-slip material.
- System equipped with two heavy-duty stabilizing jacks and two retracting outriggers that can be set without having to go beneath the work surface.



| Platform height | Platform length | Platform width | Rail length    | Wheels                 | # of Users | Part #  |
|-----------------|-----------------|----------------|----------------|------------------------|------------|---------|
| 9 ft. (2.7 m)   | 9 ft. (2.7 m)   | 3 ft. (0.9 m)  | 12 ft. (3.7 m) | 8 in. (0.2 m) Urethane | 1          | 8530397 |

TRANSPORT



# 3M™ DBI-SALA®

## Box Frame

Conveniently secure a fall arrest rigid rail in areas with limited space or inadequate overhead structure. Our Box Frame Systems are built to accommodate a specific area or piece of equipment and can be designed as permanent or portable frames, allowing for easy relocation. These systems are ANSI and OSHA compliant.

### Fixed Height Systems

- Provide effective/economical means of anchoring overhead.
- Designed for areas with no overhead obstructions or door height restrictions.

| Anchor height  | Width          | Rail length                     | Wheels                   | # of Users | Part #  |
|----------------|----------------|---------------------------------|--------------------------|------------|---------|
| 14 ft. (4.3 m) | 14 ft. (4.3 m) | Dual rail 15.5 ft. (4.7 m) each | 16 in. (0.4 m) Pneumatic | 2          | 8530345 |
| 21 ft. (6.4 m) | 15 ft. (4.6 m) | Single rail 28 ft. (8.5 m)      | 12 in. (0.3 m) Rubber    | 2          | 8530361 |
| 30 ft. (9.1 m) | 20 ft. (6.1 m) | Dual rail 32 ft. (9.8 m) each   | 16 in. (0.4 m) Pneumatic | 2          | 8530427 |

TRANSPORT

CONSTRUCTION

UTILITIES

MINING

### Adjustable Height System

- Adjustable using overhead crane, forklift or powered systems.
- Pin height selection system.
- Designed for areas with overhead obstructions and door height limitations.

| Height                      | Width          | Length                     | Wheels                | # of Users | Part #  |
|-----------------------------|----------------|----------------------------|-----------------------|------------|---------|
| 12 ft.-18 ft. (3.7 m-5.5 m) | 12 ft. (3.7 m) | Single rail 20 ft. (6.1 m) | 12 in. (0.3 m) Rubber | 2          | 8530288 |



Model shown 8530345





# 3M™ DBI-SALA®

## Trailer & Mounted Anchor Systems

One simple solution. Endless versatility. Our Trailer Mounted Systems are portable systems that can be attached to a service vehicle hitch receiver for transport to a job site. They provide a standalone solution, leveraging an integrated counterweight or easy attachment to a truck or service vehicle with minimal setup required before use. These systems incorporate overhead anchorage points up to 22 ft. (6.7 m) for a maximum of two users, and are OSHA and ANSI compliant.

### Fixed Height Systems

- Trailer mounted solutions maximize portability and versatility to and from job site.
- System quickly raises and lowers with integrated winch and handle.
- System includes heavy-duty stabilizing jacks.

| Anchor height    | Width           | # of Users | Part #  |
|------------------|-----------------|------------|---------|
| 21.5 ft. (6.6 m) | 7.2 ft. (2.2 m) | 2          | 8530624 |
| 21.5 ft. (6.6 m) | 7.0 ft. (2.1 m) | 2          | 8530690 |


| Accessory             | Applies to       | Part #  |
|-----------------------|------------------|---------|
| Drive Clutch Assembly | 8530624, 8530690 | 8548000 |
| Job Box               | 8530690          | 8530678 |
| Outrigger Pads        | 8530690          | 8548050 |

TRANSPORT

CONSTRUCTION

UTILITIES

MINING

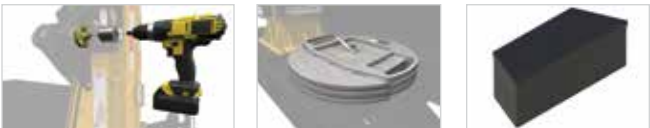

Model shown 8548000

Model shown 8548050

Model shown 8530678



# 3M™ DBI-SALA®

## Accessories

### ExoFit NEX™ Full-Body Comfort Harnesses

An industry-leader, our most advanced harnesses, providing lightweight comfort, ergonomic design and maximum durability.

#### 1113010 ExoFit NEX Vest-Style Harness

- Aluminum back D-ring, locking quick-connect buckles. (XLarge)
- |         |        |
|---------|--------|
| 1113001 | Small  |
| 1113004 | Medium |
| 1113007 | Large  |



#### 1113130 ExoFit NEX Construction-Style Harness

- Aluminum back and side D-rings, locking quick-connect buckles with sewn-in hip pad, removable belt. (XLarge)
- |         |        |
|---------|--------|
| 1113121 | Small  |
| 1113124 | Medium |
| 1113127 | Large  |



### Delta™ Full-Body Harnesses

Innovative, full-body harnesses providing easy-to-use, comfortable back and hip support to workers of all shapes and sizes

#### 1102000 Delta Vest-Style Harness

- Back D-ring, tongue-buckle leg straps. (Universal size)
- |         |                           |
|---------|---------------------------|
| 1102000 | Tongue Buckles (pictured) |
| 1110600 | Quick-Connect Buckles     |
| 1103321 | Pass-Through Buckles      |



#### 1101656 Delta Construction-Style Harness

- Vest-style, back and side D-rings, belt with sewn-in back and shoulder pads, tongue-buckle leg straps. (XLarge)
- |         |        |
|---------|--------|
| 1102201 | Small  |
| 1101654 | Medium |
| 1101655 | Large  |



### Sealed-Blok™ Self-Retracting Lifelines

- Efficient, durable SRLs, providing heavy-duty, reliable support even in the harshest environments.
- |         |                                  |
|---------|----------------------------------|
| 3400800 | Galvanized cable x 30 ft. (9 m)  |
| 3400900 | Galvanized cable x 50 ft. (15 m) |
| 3400802 | SS cable x 30 ft. (9 m)          |
| 3400902 | SS cable x 50 ft. (15 m)         |



### Ultra-Lok™ Self-Retracting Lifelines

- Long-lasting SRLs made with stainless steel components, an anti-ratcheting brake system and a semi-sealed sign.
- |         |                                    |
|---------|------------------------------------|
| 3504433 | Galvanized cable x 20 ft. (6.1 m)  |
| 3504430 | Galvanized cable x 30 ft. (9.1 m)  |
| 3504450 | Galvanized cable x 50 ft. (15.2 m) |
| 3504434 | SS cable x 20 ft. (6.1 m)          |
| 3504431 | SS cable x 30 ft. (9.1 m)          |
| 3504451 | SS cable x 50 ft. (15.2 m)         |
| 3103208 | Nylon webbing x 20 ft. (6.1 m)     |
| 3103207 | Nylon webbing x 20 ft. (6.1 m)     |



### Self-Rescue Device

- 50 ft. (15.2 m) detachable self-rescue system, self contained nylon pack with molded padding.  
19 in. H x 7 in. W x 2-1/2 in. L
- |         |                                   |
|---------|-----------------------------------|
| 3320030 | Self-Rescue Device                |
| 8900299 | Rescue Pole x 8 ft. 8 in. (2.6 m) |



### Saflok™ Carabiners

- Steel carabiner self-locking/closing 3,600 lb. (16 kN) gate.
- |         |                             |
|---------|-----------------------------|
| 2000112 | 11/16 in. (17.5 mm) opening |
| 2000113 | 1-3/16 in. (30 mm) opening  |




### Saflok Tagline for SRL

- 3/16 in. polypropylene rope with O-ring at one end.
- |         |                           |
|---------|---------------------------|
| 7211857 | Tagline x 25 ft. (7.6 m)  |
| 7211858 | Tagline x 35 ft. (10.6 m) |
| 7211856 | Tagline x 50 ft. (15 m)   |



### D-Ring Extension

- D-Ring Extension with snap hook at one end, D-ring at other end.
- |         |                             |
|---------|-----------------------------|
| 1231117 | Extension x 1.5 ft. (0.5 m) |
|---------|-----------------------------|







**3M Fall Protection Business**  
Personal Safety Division  
3833 SALA Way  
Red Wing, MN 55066 USA

Phone 800-328-6146  
Email [3mfallprotection@mmm.com](mailto:3mfallprotection@mmm.com)  
Web [3M.com/FallProtection](http://3M.com/FallProtection)

3M, DBI-SALA, Delta, ExoFit NEX, Flexiguard,  
Saflok, SafRig, Sealed-Blok and Ultra-Lok are  
trademarks of 3M Company and its affiliates.  
© 3M 2016. 9700721 Rev: E