




SPECIFICATIONS: PART No. 9906

Propane Fired Shelter Heater

Includes: Heater, Blower, Duct and Remote Thermostat

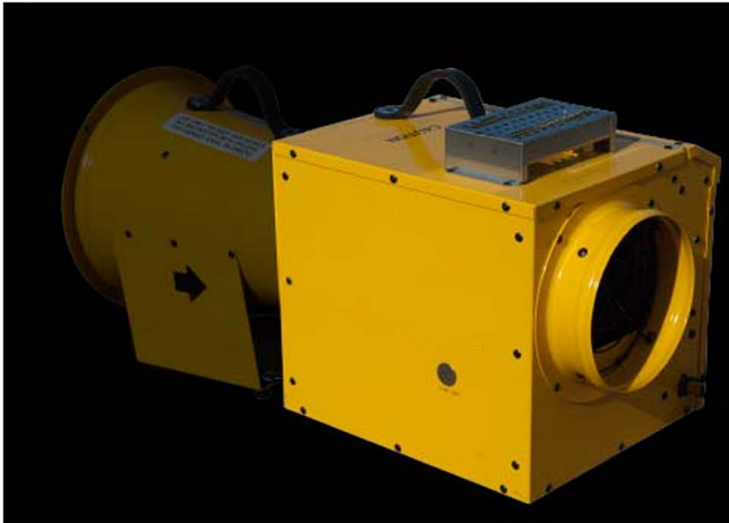

Propane Tent Heater when coupled with the required blower provides fresh warm air for all your confined space needs. This unit is propane fired and electrically powered. Requires the model 1325D Ventilator to operate. Ships with optional Remote Thermostat Control

HEATER SPECIFICATIONS

Power:	120 VAC, 1 Amp
Certifications:	CSA, CEESI
Dimensions:	18.5"L x 13.5"W x 15.25"H
Weight:	30 lbs.
Certified Air Flow:	(coupled w/1325D)
Free Air:	639 cfm
w/ one 90° bend:	532 cfm
w/ two 90° bends:	498 cfm
BTUs	70,000



BLOWER SPECIFICATIONS

Power:	Electric - 1/3 HP, 120 VAC, 3 Amps
Certifications:	CSA, CEESI
Dimensions:	14.5"L x 13"W x 14.5"H
Weight:	19.5 lbs.
Free Air (certified):	1075 cfm
w/ one 90° bend:	668 cfm
w/ two 90° bends:	585 cfm
Housing:	Formed Steel
Static Pressure:	2.09" W.C.

REMOTE THERMOSTAT

Allows heater to cycle on & off at user-adjusted temperatures while maintaining continuous, uninterrupted ventilation.



DUCTING

Case: Constructed of a durable, weather resistant, high-impact polyethylene plastic

Duct: Steel construction, and coated with a weather resistant, safety yellow powder coat finish.



Part # 9906 Tent heater system includes:

- Inline Heater, 70k btu, 120 VAC
- Axial Blower Unit, 1373 CFM Max
- Flexible Reinforced Duct, 8" dia x 15' L
- Canister for Duct
- LP Regulator and Quick Connect Hose Assembly
- Remote Thermostat

Air Shelters USA, LLC

Phone: (800) 932-6003 Web: www.zumro.com Email: info@zumro.com