

Fast. Simple. Proven.

# SHELTERS

inflation.

re-inflation.



EMERGENCY SHELTERS

SUPERIOR TECHNOLOGY

☐ Airtight, does *NOT* require constant

☐ Can be deployed for *weeks* without

□ Superior strength at any temperature.
 □ Tapered beam structure for extra strength.

☐ Mitered, **fully integrated** beam joints. ☐ Short span between Arch-Sections.

☐ Full base structure support.

☐ Durable, lightweight fabrics. ☐ *LOW air* pressure requirements.

☐ Four or more lateral roof support beams.

POWER-DEPLOYED

- DESIGNED FOR EMERGENCY SERVICES!
- EASY ONE-PERSON POWER DEPLOYED!
- IDEAL FOR MASS-CASUALTY DECON!
- PROVEN RELIABILITY FOR 20 YEARS!
- EXTREME WEATHER DEPLOYABLE!
- MOST DURABLE SHELTER ANYWHERE!
- PRE-ASSEMBLED FOR EASY SET-UP!
- VERSATILE MULTIPLE USE DESIGN!
- RAPID RE-DEPLOYMENT!
- AVAILABLE IN 12 SIZES AND 5 COLORS!
- MANY OPTIONS & DESIGNS!
- THOUSANDS IN USE EVERYWHERE!
- 100% MADE IN USA!










#### **DURABLE ALL WEATHER USE**

- ☐ Drop tested to *100 feet*.
- ☐ Deployed and maintained under **750 GPM** water flow.
- ☐ Deployed and maintained under *60 Mph* winds.
- □ -60F to +140F
- □ 20 Year track record.
- ☐ Most *reliable*Shelter available anywhere.



- **NATIONWIDE DISTRIBUTOR SUPPORT**
- ON-SITE DEMONSTRATIONS
- ON-SHE IN-SERVICE TRAINING
- LIFE TIME IN-SERVICE GUARANTEE.
- 3 YEAR WARRANTY.
- 100% MADE IN USA.
















CALL TOLL FREE: 800/932-6003

### **ZUMRO Shelters** General Features, Options and Specifications.

**ZUMRO Emergency Shelters** are the *right* choice for *all* Emergency Services. Customize your Shelter with our many available options to suit your needs. Our Shelters and options are always designed with "multiple use" in mind, for example, when outfitted for "Decon" all Shower Stalls and Curtains will be easily removable so the Shelter can be used for Rehab, Triage, Command, Patient Isolation, etc.

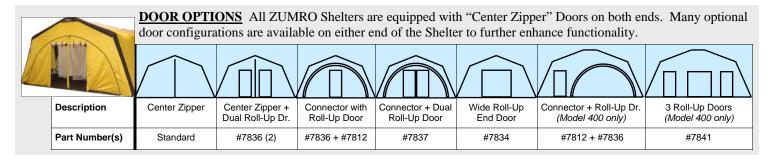



#### EXTERIOR OPTIONS

**Three-Step Decon** Shower Stall

> Part #7840 (removable)

Available Shelter Colors are: **Blue** (standard), **Red**, **White**, **Yellow**, Orange, Green, Tan and OD Green.

ID Panel Part #7815 (one each side, Velcro attached) **ID Panel Lettering** Part #7832



**Laundry Port** with Cover Part #7830



**WINDOWS** 

Part #7814

Part #7822

(under window & cover)

Screen Window only & Cover Part #7814



Center Divider Part #7817 ~ 7833 (removable)



Three Lane Stall & Pool Part #7912 (311 only) (removable)



**Cross Curtain** Part #7818~7845~7913 Center Slip-Thru opening (removable)



Dual Lane, 4-Step Stall (one shown) Part #7906 (311 only) (removable)



Inflatable Secondary **Containment Pool** Part #7819 (welded to floor)

## **ZUMRO Air-Shelter Technical Specifications**

Model & Part Number <u>150 ~ Part #7700</u>	216 ~ Part #7800	284 ~ Part #8100	311 ~ Part #7900	400 ~ Part #8200
Length11' or 3.3m	<b>16</b> ' or 4.9m	<b>21</b> ' or 6.4m	<b>21</b> ' or 6.4m	<b>21</b> ' or 6.4m
Width (internal)13.5' or 4.1m	<b>13.5</b> ' or 4.1m	<b>13.5</b> ' or 4.1m	<b>14'9"</b> or 4.5m	<b>19.2</b> ' or 5.9m
Width (external)14.8' or 4.5m	14.8' or 4.5m	14.8' <i>or</i> 4.5m	16'6" <i>or</i> 5m	20' <i>or</i> 6m
Height (internal)8' or 2.4m	8' or 2.4m	8' or 2.4m	8' or 2.4m	<b>10</b> ' or 3m
Height (external)8.7' or 2.7m	8.7' or 2.7m	8.7' or 2.7m	8.7' or 2.7m	10.7' or 3.2m
Floor Area	<b>216 Sq.Ft</b> or 20 Sq.m.	<b>284 Sq.Ft</b> <i>or</i> 26 Sq.m.	<b>311 Sq.Ft</b> <i>or</i> 29 Sq.m.	<b>400 Sq.Ft</b> /37.6 Sq.m.
Weight105 Lbs or 47 kg	135 Lbs <i>or</i> 61 kg	150 Lbs <i>or</i> 67 kg	200 Lbs <i>or</i> 99 kg	220 Lbs or 99 kg
Stored Size40x20x15 In./1x.5x.4m	40x20x15 ln./1x.5x3.8m	40x20x20 ln./1x.5x.5m	40x24x24 ln./1x.8x.8m	40x30x24 ln./1x.8x.6m
Anchor Points12	14	18	18	18
Set-up Time / Blower2 Minutes	3 Minutes	3.5 Minutes	4 Minutes	5 Minutes
Set-up Time / Airbottle30 Seconds	50 Seconds	90 Seconds	2 Minutes	2 Minutes
Air volume (approx)90 Cub. Ft. or 2265 L	120 Cub. Ft. or 3398 L	157 Cub. Ft. or 4460 L	170 Cub. Ft. or 4813 L	180 Cub. Ft. or 5097 L
Wind Resistance70 Mph or 112 km/hr	60 Mph or 96 km/hr.	60 Mph or 96 km/hr.	60 Mph or 96 km/hr.	50 Mph or 80 km/hr.
NOTE: Weights and Dimensions may vary based on installed options! Specifications may change without notice due to product improvements!				